



Nothing but **HEAVY DUTY.**



SDA

**FLUID POWER
COMPANY**

Hydraulics, Pneumatics
& Engineering

PT. SDA GLOBAL

Head Office

Jl. Margomulyo Indah 1A No. 7-8
Surabaya 60186, Jawa Timur - Indonesia
Telephone: +62 31 748 2190, 748 2191
WhatsApp: +62 812 2088 8800
Email: headoffice@sda.co.id

Jakarta Office

Komp. Puri Mutiara Blok BD No. 8
Jl. Raya Griya Utama, Sunter Agung
Kec. Tanjung Priok, Jakarta 14350 - Indonesia
Telephone: +62 21 3888 8800
WhatsApp: +62 813 1833 8800
Email: jkt@sda.co.id

SDA Cikarang

Jl. Kapuk Timur Blok F23 No. 11AB
Delta Silicon III, Cicau, Cikarang 17530
Bekasi, Jawa Barat - Indonesia
Telephone: +62 21 8997 9880
WhatsApp: +62 813 1877 8800
Email: ckr@sda.co.id

SDA Surabaya

Komp. Raden Saleh Permai Kav. 19-20
Jl. Raden Saleh No. 45
Surabaya 60174, Jawa Timur - Indonesia
Telephone: +62 31 546 8800, 546 7700
WhatsApp: +62 811 1066 8800
Email: sby@sda.co.id

SDA Semarang

Komp. THD Blok C No. 25-26
Jl. KH. Agus Salim
Purwodinatan, Semarang 50137
Jawa Tengah - Indonesia
Telephone: +62 24 8657 8800
WhatsApp: +62 813 1822 8800
Email: srg@sda.co.id

SDA Balikpapan

Jl. Mayjen. Sutoyo No. 39
Gunung Sari Ulu, Balikpapan 76122
Kalimantan Timur - Indonesia
Telephone: +62 542 776 8800
WhatsApp: +62 813 1855 8800
Email: bpp@sda.co.id

www.sda.co.id



Online Store

tokoSDA.com



Hotline **+62 31 9900 8800**



WhatsApp **+62 822 8080 8800**



[sda.id](https://www.instagram.com/sda.id)



[sdaindonesia](https://www.facebook.com/sdaindonesia)



[@sdaglobal](https://www.tiktok.com/@sdaglobal)

2024/2025 PRODUCT CATALOGUE



M12 FUEL
PERCUSSION DRILL

Voltage	12V
No Load Speed Gear 1 (rpm)	0-450
No Load Speed Gear 2 (rpm)	0-1550
Chuck Capacity (mm)	13
Max. Drilling Masonry (mm)	13
Max. Drilling Steel (mm)	13
Max. Drilling Wood (mm)	35
Max. Percussion Rate (bpm)	22500
Max. Torque (Nm)	45
Weight w/ 6.0Ah Battery Pack (kg)	1.4



M12 FPD2

M12 FUEL
1/4" HEX IMPACT DRIVER

Voltage	12V
No Load Speed (rpm)	0-1700, 0-2900 0-3600, 0-3600
Impact Rate (ipm)	0-4000
Max. Torque (Nm)	170
Tool Reception	1/4" Double End Bit
Weight w/ 6.0Ah Battery Pack (kg)	1.15



M12 FID2

M12 FUEL
1/2" STUBBY IMPACT WRENCH


Voltage	12V
No Load Speed (rpm)	0-1200, 0-1800 0-2700
Impact Rate (ipm)	0-1100, 0-2100 0-3200
Max. Bolt Diameter	M16
Anvil Type (Friction Ring)	1/2" Square
Max. Torque (Nm)	339
Weight w/ 6.0Ah Battery Pack (kg)	1.37



M12 FIWF12

M12 FUEL
1/2" RIGHT ANGLE IMPACT WRENCH

Voltage	12V
No load speed (rpm)	0-1550, 0-2300, 0-3000
Impact Rate	0-1350, 0-2700, 0-3600
Max Bolt Diameter	M16
Anvil Type (Friction Ring)	1/2" Square
Max Torque (Nm)	300
Weight w/ 3.0Ah Battery Pack (kg)	1.5

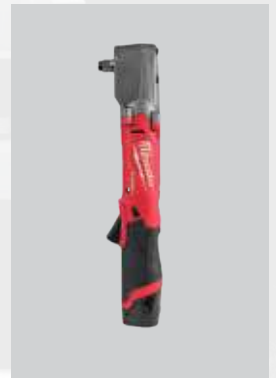

M12 FRAIW12

M12 FUEL
**1/2" COMPACT IMPACT WRENCH
WITH FRICTION RING**

Voltage	12V
No Load Speed (rpm)	0-930 / 2,100 / 3,000 / 1,300
Impact Rate (ipm)	0-1,500 / 3,000 / 3,300
Max. Bolt Diameter	M16
Anvil Type (Friction Ring)	1/2" Square
Fastening Torque	271 / 406 / 542 / 20
Max Nut Busting Torque (Nm)	745
Bare Tool Weight (g)	990



M12 FIW2F12

M12 FUEL
3/8" DIGITAL TORQUE WRENCH

Voltage	12V
No Load Speed (rpm)	0-100
Anvil Type	3/8"
Length (mm)	582
Accuracy	+/- 2% CW
Calibration	1 Year or 5000 Cycles
Max. Torque (Nm)	13.6-136
Weight w/ 2.0Ah Battery Pack (kg)	2.5



M12 ONEFTR38

M12 FUEL
1/2" DIGITAL TORQUE WRENCH

Voltage	12V
No Load Speed (rpm)	0-100
Anvil	1/2"
Accuracy	+/- 2% CW
Calibration	1 Year or 5000 Cycles
Length (mm)	587
Max. Torque (Nm)	17-203
Weight w/ 2.0Ah Battery Pack (kg)	2.5



M12 ONEFTR12

M12
RIVET TOOL

Voltage	12V
Max. Pulling Force (N)	9000
Rivet Diameter Range (mm)	2.4-4.8
Rivet Diameter (mm)	2.4, 3.2, 4.0, 4.8
Stroke Length (mm)	20.32
Weight w/ 2.0Ah Battery Pack (kg)	2.1



M12 BPRT

M12 FUEL 1/4" IMPACT RATCHET

Voltage	12V
No Load Speed (rpm)	0-250
Anvil Type	1/4" Square
Length (mm)	291
Max. Torque (Nm)	54
Weight w/ 2.0Ah Battery Pack (kg)	1.1



M12 FIR14

M12 FUEL 1/2" IMPACT RATCHET

Voltage	12V
No Load Speed (rpm)	0-175
Anvil Type	1/2" Square
Length (mm)	318
Max. Torque (Nm)	81
Weight w/ 2.0Ah Battery Pack (kg)	1.54



M12 FIR12

M12 FUEL 1/4" EXTENDED REACH HIGH SPEED RATCHET

Voltage	12V
No Load Speed (rpm)	0-450
Anvil Type	1/4" Square
Length (mm)	346
Max. Torque (Nm)	47
Weight w/ 2.0Ah Battery Pack (kg)	1.06



M12 FHIR14LR

M12 FUEL 3/8" EXTENDED REACH RATCHET

Voltage	12V
No Load Speed (rpm)	0-200
Anvil Type	3/8" Square
Length (mm)	384
Max. Torque (Nm)	75
Weight w/ 2.0Ah Battery Pack (kg)	1.4



M12 FIR38LR

M12 FUEL 3/8" EXTENDED REACH HIGH SPEED RATCHET

Voltage	12V
No Load Speed (rpm)	450
Anvil Type	3/8" Square
Length (mm)	364
Max. Torque (Nm)	47
Weight w/ 2.0 Ah Battery Pack (kg)	1.1



M12 FHIR38LR

M12 FUEL PASS-THROUGH RATCHET

Voltage	12V
Drive Size	3/8", 1/2" square anvil, and 1/4" Hex Bit
Pass Through Design	Up to 15mm
RPM	0-350
Max. Torque (Nm)	81
Length (mm)	404
Weight w/ Battery Pack (kg)	1.22kg



M12 FPTR

M12 COMPACT CAULK GUN W/ 310ML CARTRIDGE HOLDER

Voltage	12V
Max. Pushing Force (N)	1780
Speed Settings	6
Standard Equipment (ml)	310
Weight w/ 2.0Ah Battery Pack (kg)	1.9



M12 PCG/310C

20 OZ ALUMINIUM BARREL CONVERSION KIT

Product Highlights	12V Silicon Gun for M12 PCG/310C
--------------------	----------------------------------



48-08-0905

M12
GREASE GUN


Voltage	12V
Max. Operating Pressure (bar/psi)	562 / 8000
Flow System	Plunger Type with Air Bleeder Valve
Loading System	1.Cartridge (400ml) 2.Bulk (473ml) 3.Suction
Hose Type	High Pressure w/ Spring Guard and Grease Coupler
Hose Dimensions (mm)	914 X 14.4 (dia.)
Weight w/ 2.0Ah Battery Pack (kg)	3.2



M12 GG

M12
FUEL COMPACT HACKZALL

Voltage	12V
No Load Stroke Rate (spm)	0-3000
Stroke Length (mm)	15.9
Weight w/ 4.0Ah Battery Pack (kg)	1.6

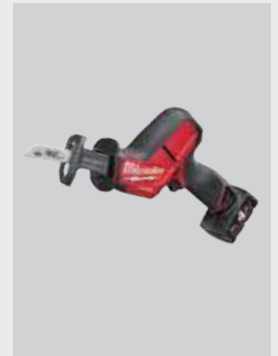

M12 CHZ

M12
FUEL STRAIGHT DIE GRINDER

Voltage	12V
No Load Speed (rpm)	0-10000, 0-15000 0-21000
Collet Size (mm)	6.0 / 8.0
Length (mm)	283
Weight w/ 3.0Ah Battery Pack (kg)	0.8



M12 FDGS

M12
DRAIN CLEANER AIR GUN

Voltage	12V
Drain Line Capacity (mm)	25-100
Air Pressure (PSI)	0-50
Variable Pressure Dial	Yes
Clearing Distance (m)	10.6
Automatic Pressure Loading	Yes
LED Work Light	Yes
Weight w/ 2.0Ah Battery Pack (kg)	3.3



M12 DCAG

M12
DRAIN CLEANER WITH 1/4" CABLE

Voltage	12V
No Load Speed (rpm)	0-500
Max. Drain Diameter (mm)	50
Spiral Diameter (mm)	6
Spiral Length (m)	7.6
Weight w/ 2.0Ah Battery Pack (kg)	4.2



M12 BDC6

ACCESSORIES
Drain Cables

48-53-2573 Designed for M12 BDC6


M12
FUEL WET/DRY VACUUM

Voltage	12V
Air Volume (L/m)	1275
Max. Vacuum (mbar)	105
Capacity (L)	6.1
Weight w/ 6.0Ah Battery Pack (kg)	5



M12 FVCL

M12
FUEL 16 - GAUGE NIBBLER

Voltage	12V
No Load Stroke Rate	1,400-2,200
Cutting Width (mm)	5
Smallest Curve Radius (mm)	40.7
Starting Hole Diameter (mm)	21
Max. Cutting Steel < 400 N/mm2 (mm)	1.6
Max. Cutting Steel < 600 N/mm2 (mm)	1.2
Max. Cutting Steel < 800 N/mm2 (mm)	0.7
Max. Cutting Aluminum < 250 N/mm2 (mm)	2.1
Max. Cutting Stainless Steel < 600 N/mm2 (mm)	1.2



M12 FNB16



M12 LED SPOT LIGHT

Voltage	12V		
Modes	High	Low	Strobe
Lumens	750	400	750
Runtime on 4.0Ah Battery (h)	4	8	8
Beam Distance	640		
IP Rating	IP54		
Weight without Battery Pack (kg)	0.6		



M12 SLED

M12 LED UNDERHOOD LIGHT

Voltage	12V	
Modes	High	Low
Lumens	1350	600
Runtime on 4.0Ah Battery (h)	4	8
Hands-free	FINISHGUARD hooks, Stainless steel hook	
IP Rating	IP54	
Weight without Battery Pack (kg)	1.1	



M12 UHL

M12 LED AREA LIGHT


Voltage	12V		
Modes	High	Medium	Low
Lumens	1000	400	200
Runtime on 4.0Ah Battery (h)	3.5	7.5	15
Hands-free	Integrated Magnets, Spring Loaded Clamp, Key Hole Hanger, Wire Hanger		
IP Rating	IP54		
Weight without Battery Pack (kg)	1.0		



M12 AL

M12 LED STAND LIGHT

Voltage	12V	
Modes	High	Low
Lumens	1400	700
Runtime on 6.0Ah Battery (h)	4	10
Head Rotation (°)	210 Vertically, 270 Horizontally	
Max. Height (m)	1.7	
Collapsed (m)	0.8	
Weight without Battery Pack (kg)	3.1	

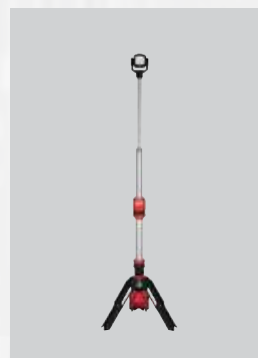

M12 SAL

M12 PAINT AND DETAILING COLOR MATCH LIGHT

Voltage	12V		
No. of Modes	3		
Max. Lumens	1000		
Max. Runtime (h)	12		
Color Temp.	5		
IP Rating	IP54		



M12 CML

M12 LED STICK LIGHT

Voltage	12V	
Modes	High	
Lumens	220	
Runtime (h)	11	
Hands-free	Multi-position Stainless Steel Hook	
Weight without Battery Pack (kg)	0.2	



M12 SL

M12 PIVOTING AREA LIGHT

Voltage	12V	
Modes	High	Low
Lumens	700	250
Runtime on 4.0Ah Battery (h)	8	24
USB Charging Output (V/A)	5	2.1
IP Rating	IP54	
Weight without Battery Pack (kg)	0.3	



M12 PAL

M12 LED LANTERN LIGHT

Voltage	12V			
Modes	High	Medium	Low	Strobe
Lumens	400	200	40	400
Runtime on 4.0Ah Battery (h)	8	15	67	16
Head Rotation (°)	180 - 360			
USB Charger	2.1A			
Hands-free	2 Stainless Steel Hooks			
IP Rating	IP54			
Weight without Battery Pack (kg)	0.4			



M12 LL



Nothing but **HEAVY DUTY.**™

M12 FUEL™

M18 FUEL™



FORCELOGIC™



**PERFORMANCE DRIVEN
TRADE FOCUSED
SYSTEM WIDE**

M18 FUEL GEN 4 PERCUSSION DRILL

Voltage	18V
No Load Speed Gear 1 (rpm)	0-500
No Load Speed Gear 2 (rpm)	0-2100
Chuck Capacity (mm)	13
Max. Drilling Masonry (mm)	16
Max. Drilling Steel (mm)	16
Max. Drilling Wood (mm)	89
Max. Percussion Rate (bpm)	33.000
Max. Torque (Nm)	158
Weight w/ 5.0Ah Battery Pack (kg)	2.2



M18 FPD3

M18 FUEL 1/4" HEX IMPACT DRIVER

Voltage	18V
No Load Speed (rpm)	1900, 2800 3600, 0-3600
Impact Rate (ipm)	1200, 3400 4300, 0-4300
Max. Bolt Diameter	M16
Max. Torque (Nm)	226
Tool Reception	1/4" Double End Bit
Weight w/ 5.0Ah Battery Pack (kg)	1.7



M18 FID2

M18 FUEL 26 MM SDS-PLUS ROTARY HAMMER (3-MODE)

Voltage	18V
Impact energy(J)	2.7
Max. Hammer Rate (bpm)	0-4800
No Load Speed (rpm)	0-1330
Max. Drilling Concrete (mm)	26
Max. Drilling Steel (mm)	13
Max. Drilling Wood (mm)	28
Vibration Drilling (m/s^2)	12.87
Vibration Chiseling (m/s^2)	13.41
Weight w/ 5.0Ah Battery Pack (kg)	4.1/4.3 (FIXTEC)



M18 FHX

M18 FUEL 32 MM SDS-PLUS ROTARY HAMMER (3-MODE)

Voltage	18V
Impact energy(J)	5
Max. Hammer Rate (bpm)	0-4600
No Load Speed (rpm)	0-800
Max. Drilling Concrete (mm)	32
Max. Drilling Steel (mm)	13
Max. Drilling Wood (mm)	30
Vibration Drilling (m/s^2)	6.9
Vibration Chiseling (m/s^2)	7.4
Weight w/ 5.0Ah Battery Pack (kg)	4.7/4.9 (FIXTEC)



M18 FHPX

M18 FUEL 8 KG SDS-MAX DRILLING AND BREAKING HAMMER

Voltage	18V
Blow Energy (EPTA)(J)	11
Max. Hammer Rate (bpm)	0-2900
No Load Speed (rpm)	0-380
Max. Drilling Concrete (mm)	45
Max. Drilling Tunnel Bit (mm)	65
Max. Drilling Core Bit (mm)	150
Vibration Drilling (m/s^2)	9.4
Vibration Chiseling (m/s^2)	9.4
Weight w/ 12.0Ah Battery Pack (kg)	10.2



M18 FHM

M18 FUEL RIVET TOOL

Voltage	18V
Max. Pulling Force (N)	20000
Rivet Diameter Range (mm)	4.8-7.0
Rivet Diameter (mm)	4.8, 6.0, 6.4, 7.0
Stroke Length (mm)	30
Weight w/ 2.0Ah Battery Pack (kg)	2.5



M18 FRT

M18 FUEL 100MM VARIABLE SPEED BRAKING GRINDER

Voltage	18V
No Load Speed (rpm)	3,500 -8,500
Disc Diameter (mm)	100
Max. Cutting Depth (mm)	21
Spindle Size	M10
Switch Type	Paddle
Weight w/ 5.0Ah Battery Pack (kg)	2.6



M18 FSAGV100XPDB

M18 FUEL 125MM VARIABLE SPEED BRAKING GRINDER

Voltage	18V
No Load Speed (rpm)	3,500 -8,500
Disc Diameter (mm)	125
Max. Cutting Depth (mm)	33
Spindle Size	M14
Switch Type	Paddle
Weight w/ 5.0Ah Battery Pack (kg)	2.7



M18 FSAGV125XPDB

M18 FUEL
1/2" COMPACT IMPACT WRENCH

M18 FIW212

Voltage	18V
No load speed (rpm)	0-900, 0-1650, 0-2400, 0-1200
Impact Rate	0-1000, 0-2400, 0-3500, N/A
Max. Bolt Diameter	M18
Anvil Type (Friction Ring + Through Hole)	1/2" Square
Max. Torque (Nm)	339
Weight w/ 5.0Ah Battery Pack (kg)	1.8


M18 FUEL
1/2" MID-TORQUE IMPACT WRENCH

M18 FMTIW2F12

Voltage	18V
No load speed (rpm)	0-1250, 0-1950, 0-2575, 0-1325
Impact Rate	0-900, 0-2100, 0-3100, N/A
Max. Bolt Diameter	M22
Anvil Type (Friction Ring)	1/2" Square
Max. Torque (Nm)	881
Weight w/ 5.0Ah Battery Pack (kg)	2.3


M18 FUEL
1/2" HIGH TORQUE IMPACT WRENCH

M18 FHIWF12

Voltage	18V
No Load Speed (rpm)	0-550, 0-1400 0-1750, 0-1750
Impact Rate (ipm)	0-950, 0-1750 0-2100, 0-2100
Max. Bolt Diameter	M33
Max. Nut Busting Torque (Nm)	1898
Max. Torque (Nm)	1356
Anvil Type (Friction Ring)	1/2" Square
Weight w/ 5.0Ah Battery Pack (kg)	3.3


M18 FUEL
GEN3 1/2" HIGH TORQUE IMPACT WRENCH

M18 FHIWF12

Voltage	18V
No load speed (rpm)	0-700/0-1300/ 0-2000/0-2000
Impact Rate	0-1300/0-2200/ 0-2400/0-2400
Max. Bolt Diameter	M36
Nut Busting Torque (Nm)	2034
Max. Torque (Nm)	881/1220/1491/68
Weight w/ 5.0Ah Battery Pack (kg)	3.4


M18 FUEL
3/4" HIGH TORQUE IMPACT WRENCH

M18 ONEFHIWF34

Voltage	18V
No Load Speed (rpm)	0-800, 0-1300 0-1800, 0-1800
Impact Rate (ipm)	0-850, 0-1850 0-2400, 0-2400
Max. Bolt Diameter	M33
Max. Nut Busting Torque (Nm)	2032
Max. Torque (Nm)	1627
Anvil Type (Friction Ring)	3/4" Square
Weight w/ 5.0Ah Battery Pack (kg)	3.5


M18 FUEL
1" HIGH TORQUE IMPACT WRENCH

M18 ONEFHIWF1

Voltage	18V
No Load Speed (rpm)	0-950, 0-1080 0-1370, 0-1670
Impact Rate (ipm)	0-1350, 0-1650 0-2100, 0-2500
Max. Bolt Diameter	M42
Max. Nut Busting Torque (Nm)	2440
Max. Torque (Nm)	2033
Anvil Type (Friction Ring & Through Hole)	1" Square
Weight w/ 8.0Ah Battery Pack (kg)	5.9


M18 FUEL
1" D-HANDLE HIGH TORQUE IMPACT WRENCH

M18 ONEFHIWF1DS

Voltage	18V
No load speed (rpm)	0-600, 0-700, 0-900, 0-1200
Impact Rate (ipm)	0-750, 0-930, 0-1200, 0-1440
Max. Bolt Diameter	M48
Max. Nut Busting Torque (Nm)	2711
Max. Torque (Nm)	2576
Anvil Type (Friction Ring)	1" Square
Weight w/ 12.0Ah Battery Pack (kg)	11.34


M18 FUEL
1" EXTENDED ANVIL D-HANDLE HIGH TORQUE IMPACT WRENCH

M18 ONEFHIWF1D

Voltage	18V
No load speed (rpm)	0-600, 0-700, 0-900, 0-1200
Impact Rate (ipm)	0-750, 0-930, 0-1200, 0-1440
Max. Bolt Diameter	M48
Max. Nut Busting Torque (Nm)	2711
Max. Torque (Nm)	2576
Anvil Type (Friction Ring)	1" Square
Weight w/ 12.0Ah Battery Pack (kg)	12.34



M18 FUEL

1" RAILWAY IMPACT WRENCH WITH FRICTION RING

Voltage	18V
No load speed (rpm)	1000/ 1400 1670/ 1670
Impact Rate (ipm)	1750/ 2150 2500/ 2500
Max. Bolt Diameter	M42
Max. Nut Busting Torque (Nm)	2000
Max. Torque (Nm)	730/ 1500/ 2000
Anvil Type (Friction Ring)	1" Square
Weight w/ 12.0Ah Battery Pack (kg)	7.8

M18 FHIWF1R



M18 FUEL

38MM MAGNETIC DRILL

Voltage	18V
No Load Speed Gear 1 (rpm)	0-400
No Load Speed Gear 2 (rpm)	0-690
Stroke Length (mm)	146
Mag. Holding Power (at drill point pressure) (N)	8890
Max. Depth Broaching Capacity (mm)	50
Max. Diameter Broaching Capacity (mm)	38
Max. Drilling Solid bit (mm)	13
Weight w/ 5.0Ah Battery Pack (kg)	13.0

M18 FMDP



M18 FUEL

HACKZALL

Voltage	18V
No Load Stroke Rate (spm)	0-3000
Stroke Length (mm)	22
Weight w/ 5.0Ah Battery Pack (kg)	2.6

M18 FHZ




M18 FUEL

SAWZALL

Voltage	18V
No Load Stroke Rate (spm)	0-3000
Stroke Length (mm)	32
Adjustable Shoe	Yes
LED Light	Yes
Hang Hook	Yes
Weight w/ 5.0Ah battery pack (kg)	3.8

M18 FSZ

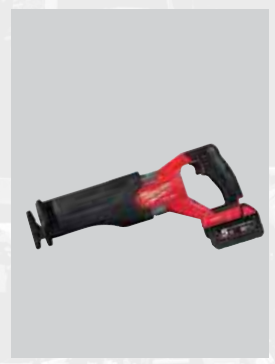

M18 FUEL

SUPER SAWZALL

Voltage	18V
No Load Stroke Rate (spm)	0-3000
Stroke Length (mm)	32
On/Off Orbital	Yes
5-Speed Dial	Yes
Adjustable Shoe	Yes
Hang Hook	Yes
Weight w/ 12.0Ah Battery Pack (kg)	5.5

M18 FSX



M18 FUEL

125MM BANDSAW

Voltage	18V
No Load Speed (m/min)	0-116
Blade Length (mm)	1139.8
Max. Cutting Capacity (mm)	125 x 125
Weight w/ 5.0Ah Battery Pack (kg)	7.3

M18 CBS125



M18 FUEL

GEN2 DEEP CUT BAND SAW

Voltage	18V
No Load Speed (rpm)	0-116
Blade Length (mm)	1139.83
Cutting Capacity Rect. Stock (mm)	125 x 125
Weight w/ 5.0Ah Battery Pack (kg)	7.3

M18 FBS125




M18 FUEL

METAL SAW

Voltage	18V
No Load Speed (rpm)	0-3,900
Blade Diameter (mm)	150
Arbor Size (mm)	20
Max. Cutting Capacity	
Steel Plate (mm)	ø 6.5
Metal Pipe (mm)	ø 57
Weight w/ 5.0Ah Battery Pack (kg)	2.8

M18 FMCS

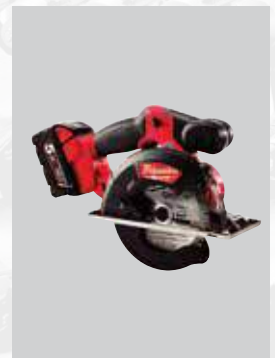

M18
HEAT GUN

M18 BHG

Voltage	18V
Temperature (°C)	470
Air Flow (l/min)	170
Length (mm)	163
Weight w/ 5.0Ah Battery Pack (kg)	1.6


M18 FUEL
7.6L COMPACT AIR COMPRESSOR

M18 FAC

Voltage	18V
Air Tank Capacity (L)	7.6
Max. Air Pressure	9.31 bar / 135 psi
Approx. Cut in Pressure	7.2 bar / 105 psi
Approx. Cut out Pressure	9.3 bar / 135 psi
Free Air Delivery	48 L/mins at 2.8 bar
Quick Connect type	1/4" Nitto
Sound Level (dBA)	68
Pump Type	Oil Free
Regulator	Single Turn
Weight w/ 5.0Ah Battery Pack (kg)	14.7


M18 FUEL
5CFM VACUUM PUMP

M18 FVP5

Voltage	18V
Flow Rate	5 CFM (142 L/min)
Ultimate Vacuum	25 Microns
Port Compatibility	1/4", 3/8", 1/2", & 5/16" Adaptor
Pump Type	Two-Stage Rotary Vane
Oil Capacity	550 ml
Manifold Mode	Yes
Gas Ballast Valve	Yes
Isolating Ball Valve	Yes
Internal Check Valve	Yes
Weight w/ 8.0Ah Battery Pack (kg)	9.6


M18 FUEL
BACKPACK VACUUM

M18 FBPV

Voltage	18V
Air Volume (m³/minute)	1557
Capacity (l)	3.8
Max. Vacuum (mbar)	189
Weight w/ 2.0Ah Battery Pack (kg)	8.4


M18
WET/DRY VACUUM

M18 VC-2

Voltage	18V
Air Volume (L/m)	1300
Max. Vacuum (mbar)	80
Capacity (L)	7.5
Weight w/ 5.0Ah Battery Pack (kg)	5.3


M18 FUEL
23L WET/DRY VACUUM

M18 FVC23L

Voltage	18V
Air Volume (L/m)	2463
Max. Pressure (mbar)	149
Capacity (L)	23
Weight w/ 12.0Ah Battery Pack (kg)	15


M18
1/4" DIE GRINDER SLIDE SWITCH

M18 FDGRB

Voltage	18V
No. Load Speed (rpm)	27,000
Brake	Yes
Max. Grinding Accessories Diameter (mm)	50
Weight w/ 5.0Ah Battery Pack (kg)	2.0


M18 FUEL
BRUSHLESS THREADED ROD CUTTER

M18 BLTRC

Voltage	18V
Integrated Brushless Motor	Yes
Weight w/ 2.0Ah Battery Pack (kg)	3.9



M18 FUEL CHAINSAW


Voltage	18V
No Load Chain Speed (m/s)	12.4
Max Bar Length (mm)	304.8
Usable Cutting Length (mm)	280
Chain Oil Tank Capacity (mL)	200
Chain Gauge (mm)	1.1
Chain Pitch (mm)	9.5 low profile
Variable Speed Trigger	Yes
Weight w/ 12.0Ah Battery Pack (kg)	6.3



M18 FCHSC

M18 FUEL TOP HANDLE CHAINSAW 356 MM (14")

Voltage	18V
Chain File Size (mm/°)	4
Chain Bar Length (mm/°)	35
Chain Speed (m/s)	15
Drive Links	59
Oil Tank Capacity (L)	0.2
Chain Pitch (mm)	8.3 / .325"
Weight w/ 8.0 Ah Battery Pack (kg)	4.7

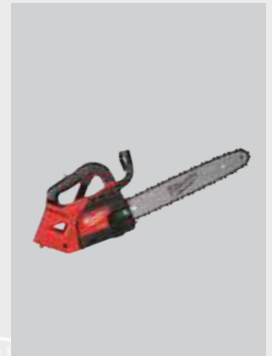

M18 FTHCHS35

M18 FUEL CHAINSAW


Voltage	18V
No Load Chain Speed (m/s)	12.4
Max Bar Length (mm)	406.4
Usable Cutting Length (mm)	380
Chain Oil Tank Capacity (mL)	200
Chain Gauge (mm)	1.1
Chain Pitch (mm)	9.5 low profile
Variable Speed Trigger	Yes
Weight w/ 12.0Ah Battery Pack (kg)	6.4



M18 FCHS

M18 FUEL 20" DOUBLE BATTERY CHAIN SAW

Voltage	18V
Max. Torque (Nm)	9.5
Chain Bar Length (cm)	50
Power (HP)	5.8
Chain Oil Tank Capacity (mL)	169
Chain Gauge (mm/°)	1.3 / 0.050"
Chain Pitch (mm/°)	8.3 / .325
Chain Speed (m/s)	14.3
Weight w/ 2x8.0 Ah Battery (kg)	9.0

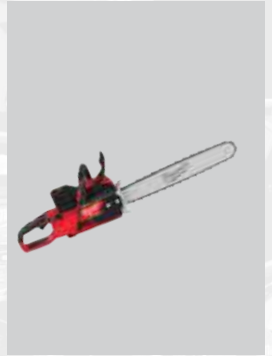

M18 F2CHS50

M18 FUEL 200MM / 8" HATCHET PRUNING SAW

Voltage	18V
No Load Speed (m/s)	5
Max Bar Length (mm)	200
Usable Cutting Length (mm)	190
Chain Pitch (mm)	9.5
Chain Gauge	1.1
Drive Link	33
Chain Oil Tank Capacity (ml)	77
Variable Speed Trigger	Yes
Weight w/ 8.0Ah Battery Pack (kg)	3.3



M18 FHS20

M18 FUEL COMPACT BLOWER

Voltage	18V
Max. Air Volume (m³/minute)	2.9
Max. Airflow Speed (km/h)	42.8
Noise Rating (db)	77.7
Length without Nozzle (mm)	375
Weight w/ 4.0Ah Battery Pack (kg)	1.9



M18 BBL

M18 FUEL BLOWER

Voltage	18V
Max. Air Volume (m³/minute)	12.7
Max. Airflow Speed (km/h)	193
Noise Rating (db)	98
Lock On Button	Yes
Total Length (mm)	859
Weight w/ 8.0Ah Battery Pack (kg)	3.3



M18 FBL

M18 FUEL GEN3 BLOWER

Voltage	18V
Fan Speed (rpm)	21,000
Airflow Rate (m³/min)	14.2
Blowing Force (N)	12.2
Airflow Speed (km/h)	193
Noise Rating (db (A))	92.6
Weight w/ 12.0Ah Battery Pack (kg)	4.3



M18 FBLG3

**M18 FUEL DUAL BATTERY
SELF-PROPELLED LAWN MOWER 53CM**

M18 F2LM53

Voltage	18V
Cutting Capacity (mm)	533
No Load Speed (rpm)	2.800-3.300
Grass Bag Capacity	70
Height range (mm)	25-100, 7 positions
Variable Speed Setting	0-6.5 km/h 5 Settings
Throttle Response	Instant
High Lift Mode	Yes
Weight w/ 12.0Ah Battery Pack (kg)	38.6


**M18 FUEL OUTDOOR
POWER HEAD WITH QUIK-LOK**

M18 F0PH

Voltage	18V
Speed Settings	2
No Load Speed - Low (rpm)	0-6860
No Load Speed - High (rpm)	0-8680
Length (mm)	881
Weight w/ 9.0Ah Battery Pack (kg)	4.1


**M18 FUEL GEN 2 QUIK-LOK
BRUSH CUTTER ATTACHMENT**

M18 F0PH-BCA

Voltage	18V
Speed Settings	2
No Load Speed - Low (rpm)	4900
No Load Speed - High (rpm)	6200
Blade Size (mm)	230
Max Cutting Capacity (mm)	32
Weight (kg)	1.6


**M18 FUEL QUIK-LOK
POLE SAW ATTACHMENT**

M18 F0PH-CSA

Voltage	18V
Speed Settings	2
No Load Speed - Low (rpm)	0-3700
No Load Speed - High (rpm)	0-4600
No Load Chain Speed (m/s)	8.6
Bar Length (mm)	254
Usable Cutting Length (mm)	230
Chain Oil Tank Capacity (ml)	140
Length (mm)	1245
Weight (kg)	1.9


**M18 FUEL QUIK-LOK
LINE TRIMMER ATTACHMENT**

M18 F0PH-LTA

Voltage	18V
Speed Settings	2
No Load Speed - Low (rpm)	0-4900
No Load Speed - High (rpm)	0-6200
Max. Cutting Capacity (mm)	400
Cutting Line Max. Diameter (mm)	2.4
Length (mm)	1020
Weight (kg)	1.7


**M18 FUEL QUIK-LOK
EDGER ATTACHMENT**

M18 F0PH-EA

Voltage	18V
Speed Settings	2
No Load Speed - Low (rpm)	0-3000
No Load Speed - High (rpm)	0-3900
Blade Diameter (mm)	203
Max. Cutting Capacity (mm)	50
Length (mm)	965
Weight (kg)	2.4


**M18 FUEL QUIK-LOK
HEDGE TRIMMER ATTACHMENT**

M18 F0PH-HTA

Voltage	18V
Speed Settings	2
No Load Speed - Low (rpm)	0-2800
No Load Speed - High (rpm)	0-3500
Blade Length (mm)	508
Max. Cutting Capacity (mm)	25
Tooth Spacing (mm)	25
Length (mm)	1524
Weight (kg)	2.6


**M18 FUEL QUIK-LOK
EXTENSION ATTACHMENT**

M18 F0PH-EXA

Voltage	18V
Length (mm)	1029
Weight (kg)	0.9



M18 LED TASK/AREA LIGHT

Voltage	18V		
Modes	High	Medium	Low
Lumens Area Mode	2200	1100	550
Lumens Flood Mode	100	500	250
Runtime on 5.0Ah Battery (h)	4	8	16
Weight without Battery Pack (kg)	2.5		



M18 TAL

M18 LED SEARCH LIGHT

Voltage	18V			
Modes	Spot/Flood	Flood	Spot	Strobe
Lumens	1250	1200	600	1200
Runtime on 5.0Ah Battery (h)	4	4	7	5
Head Rotation (°)	198			
Beam Distance (m)	650			
IP Rating	IP54			
Weight without Battery Pack (kg)	0.4			



M18 SLED

M18 LED AREA LIGHT

Voltage	18V		
Modes	High	Medium	Low
Lumens	1500	780	
Runtime on 5.0Ah Battery (h)	5	10	
Hands-free	Keyhole Hanger, EMT hanger		
Weight without Battery Pack (kg)	1.5		




M18 AL

M18 HIGH PERFORMANCE AREA LIGHT

Voltage	18V		
Modes	High	Medium	Low
Lumens	4000	2000	1200
Runtime on 5.0Ah Battery (H)	3	6	12
Head Rotation	120°		
AC (V)	100-240		
Weight without Battery Pack (kg)	2.6		



M18 HOAL

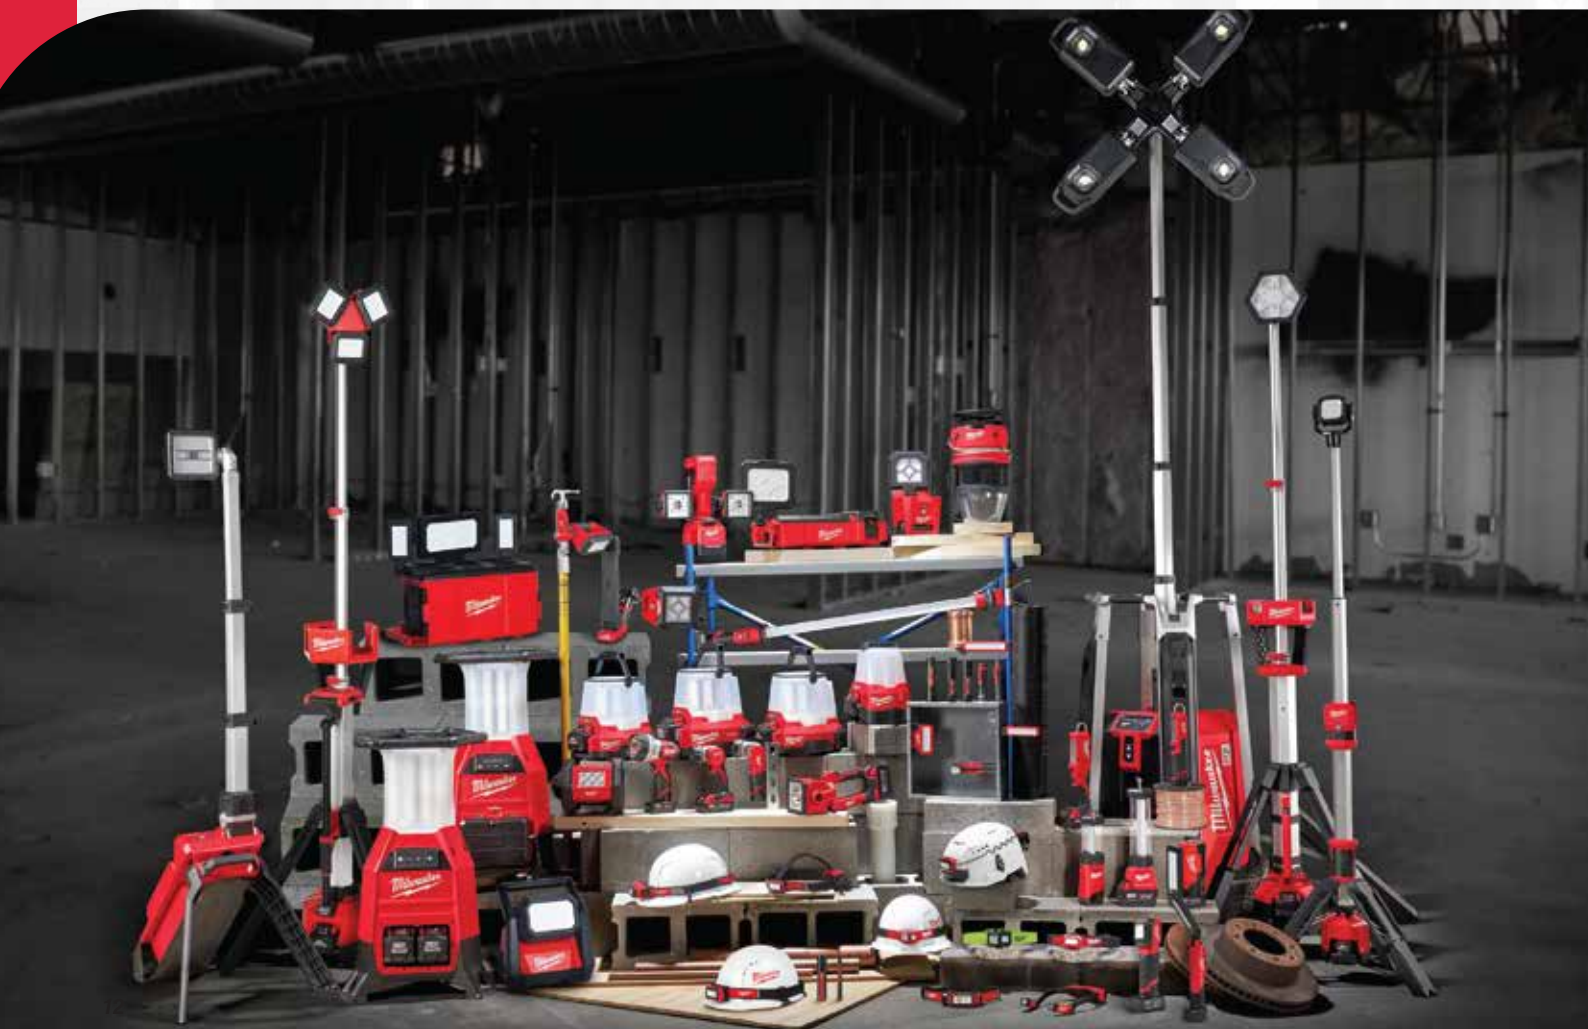

M18 LED UTILITY BUCKET LIGHT

M18 UBL

Voltage	18V
Modes	Flood Spot/Flood Spot
Lumens	2500 2200 800
Runtime on 5.0Ah Battery (h)	4 4 6
Head Rotation (°)	180° Vertical and horizontal
Hands-free	Spring-loaded Clamp
Beam Distance (m)	450
IP Rating	IP56
Weight without Battery Pack (kg)	4.8


M18 LED GEN 2 PIVOTING AREA LIGHT


M18 PAL2

Voltage	18V
Modes	High Medium Low
Lumens	2000 1000 500
Adjustable Lens	Yes
Head Rotation (°)	160 & 359
IP Rating	IP20


M18 LED STAND LIGHT

M18 SAL2

Voltage	18V
Modes	High Medium Low
Lumens	2800 1300 860
Runtime on 5.0Ah Battery (h)	4.5 8.5 13.5
Head Rotation (°)	230° Vertical, 240° Horizontal
Max. Height (m)	2.2
Collapsed (m)	1.1
IP Rating	IP54
Weight w/ 5.0Ah Battery Pack (kg)	7.6

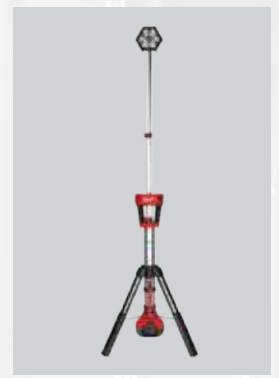
M18 LED REMOTE STAND LIGHT


M18 ONERSAL

Voltage	18V
Modes	High Medium Low
Lumens	5400 3100 1600
Runtime on (2x9.0Ah) Battery (h)	7 12.5 26
Head Rotation (°)	220° Vertical and Horizontal
Max. Height (m)	1.65
Collapsed (m)	0.5
IP Rating	IP67
Weight without Battery Pack (kg)	8.7


M18 HIGH OUTPUT STAND AREA LIGHT / CHARGER

M18 HOSALC

Voltage	18V
Modes	High Medium Low
Lumens	6000 4000 1700
Runtime on 8.0Ah Battery(h)	3.5 5 10
Max/Collapsed Height (cm)	213/122cm
AC (V)	100-240
M18 Battery Charger	Yes
Weight without Battery Pack (kg)	9.6

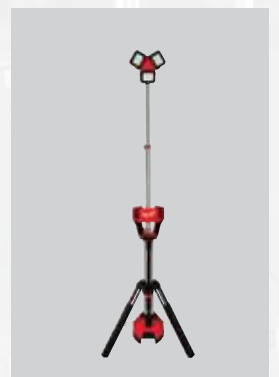
M18 MULTI-DIRECTIONAL TASK LIGHT


M18 MDTL

Voltage	18V
Modes	All Lights: High, Medium, Low Outer Lights: High, Medium, Low Middle Light: High, Medium, Low
Lumens	4500 / 2000 / 1,200 3000 1300 / 800 1500 / 650 / 400
Runtime on (5.0Ah) Battery (h)	3 hrs / 6 hrs / 11 hrs 4 hrs / 9 hrs / 16 hrs 8 hrs / 18 hrs / 30 hrs
DC Input	18 V / 29W
AC Input	100 – 240 V / ~50-60 Hz / 35W
Light Head Mobility	270° x 270°


M18 MAGNETIC BOOM LIGHT

M18 ABL

Voltage	18V
Modes	Low Medium High
Lumens	1000 2500 2500
Runtime on 5.0Ah Battery(h)	12 Hrs 8 Hrs 4.5 Hrs
Extended Light Reach (m)	1.1

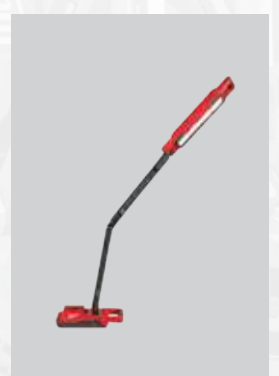

M18 FORCE LOGIC™

M18 FORCE LOGIC 6 TON CU/AL CABLE CUTTER

M18 HCC

Voltage	18V
Cutting Range (CU/AL) (mm)	35
Cutting Range (ACSR) (mm)	22.5
Cutting Range (Fine Stranded) (mm)	35
Cut Speed (s)	3
No. of Cuts/Blade	3,000+
No. of Cuts/Battery Charge	150+
Head Rotation (°)	350
Auto Retraction	Yes
Weight w/ 5.0Ah Battery Pack (kg)	3.7



M18 FORCE LOGIC OVERHEAD CABLE CUTTER

M18 HCC45

Voltage	18V
Cutting Range (1590 Falcon ACSR) (mm)	45
Cutting Range (EHS Guy Wire) (mm)	12.7
Cut Speed (s)	7.7
No. of Cuts per 5.0Ah Battery Pack	100+
Head Rotation (°)	340
Output Force (tons)	9
Weight w/ 5.0Ah Battery Pack (kg)	6



M18 FORCE LOGIC 6T COMMERCIAL CRIMPER

M18 HCCT

Voltage	18V
Output Force (tons)	6
Range (mm²)	Copper: 300 Aluminum: 150
Crimp Speed (s)	3
PFM Adaptive Pressure Control System	Yes
No. of Crimps per 2.0Ah Battery Pack	220+
Head Rotation (°)	350
Weight w/ 2.0Ah Battery Pack (kg)	3.7



M18 FORCE LOGIC 60KN GUILLOTINE CRIMPER

M18 ONEHCCT60

Voltage	18V
Nominal Force (kN)	60
Max. Compression Range (mm²)	300
Jaw Style	Guillotine



M18 FORCE LOGIC UNDERGROUND CABLE CUTTER

M18 HCC75R

Voltage	18V
Cutting Range (CU/AL Cutting Jaw) (mm)	75
Cut Speed (s)	9.5
No. of Cuts Per 5.0Ah Battery Pack	100+
Head Rotation (°)	340
Output Force (tons)	9
Weight w/ 5.0Ah Battery Pack (kg)	7.9




**M18 FORCE LOGIC
HYDRAULIC 109 KN CABLE CRIMPER**

M18 HCCT109/42-0C

Voltage	18V
Crimping Range (mm²)	16-400
Jaw Opening Capacity for Connector (mm)	42
Press Force (kn)	109
Vibration Level	0.5
Weight w/ 2.0Ah Battery Pack (kg)	5.6


**M18 FORCE LOGIC
15T CRIMPER**

M18 HCCT15

Voltage	18V
Material Composition	Reinforced Nylon
Length (inch)	4.53
Weight (lb)	16.85
Height (inch)	6.69
Width (inch)	26.5
Force (tons)	15
Capacity Cu	#8AWG - 1500 MCM Cu
Capacity Al	#8AWG - 1250 MCM Al


**M18 FORCE LOGIC
STRUT SHEAR**

M18 STS0

Voltage	18V
Strut material	Mild steel, Galvanized steel
Max material thickness	3mm
Force	176.4 kN
Cutting cycle	5 seconds
Dual LEDs	Yes
Tri-Stand chain vice mount	Yes
Die Retention Arm	Yes
Weight (kg)	10.7


**M18 FORCE LOGIC
700 BAR HYDRAULIC PUMP**

M18 HUP700

Voltage	18V
Force Output (bar)	700 (10,000 psi)
Oil Delivery Low Pressure (l/min)	2.0
Oil Delivery High Pressure (l/min)	0.4
Oil Capacity (L)	1.3
Remote Controller	Wired & Wireless
Adaptive Pressure Control	PFM
Weight w/ 12.0Ah Battery Pack (kg)	16.5





PORTABLE POWER SUPPLY

MXF PS

Loading Capacity (kg)	69
Weight (kg)	26
Water Tank Capacity (L)	10.4



350MM / 14" CUT-OFF SAW

MXF COS350G2

No load speed (rpm)	0-3,370
Disc Diameter	350mm
Max. Cutting Depth (mm)	124
Arbor Size (mm)	20 / 25.4 / 27
Weight w/ Battery (kg)	13.3



ACCESSORIES

MXF COSC	MX FUEL Cut-Off Saw Cart
4932471985	Milwaukee 350x25.4mm Hudd SpeedCross Diamond Blade
4932471988	Milwaukee 350x25.4mm Steelhead Diamond Blade



DEMOLITION HAMMER 28MM HEX BREAKER

MXF DH2528-0G0

Loading Capacity (kg)	69
Weight (kg)	26
Water Tank Capacity (L)	10.4

ACCESSORIES

4932459774	Milwaukee 28 mm Hex 400 mm Pointed Chisel
4932459775	Milwaukee 28 mm Hex 35x400 mm Flat Chisel
4932459776	Milwaukee 28 mm Hex 80x400 mm Wide Chisel



TOWER LIGHT

MXF TL

Voltage (AC)	220 - 240
Max. Lumens	27,000
Max. Height (m)	3.1
Max. Runtime (AC)	Endless
IP Rating	IP55
Weight with Battery (kg)	53



COMPACT TOWER LIGHT

MXF TLIC

Loading Capacity (kg)	69
Weight (kg)	26
Water Tank Capacity (L)	10.4



PIPE THREADING MACHINE

MXF PTR2

Speed Control (rpm)	39/ 59
Pipe Capacity	1/8" - 2"
Micro-Adjust Die Head	Yes
Self-Oiling	Yes
Self-Contained Oil Reservoir	Yes
Weight with Battery (kg)	108



MX FUEL™ REDLITHIUM™ 6.0 AH BATTERY

MXF XC406

Capacity	6.0 Ah
Battery Type	Lithium-ion
Weight (kg)	4.8



MX FUEL™ REDLITHIUM™ 8.0 AH BATTERY

MXF XC608

Capacity	8.0 Ah
Battery Type	Lithium-ion
Weight (kg)	4.4



CHARGER

MXF C

Charging time	CP203	55 min
	XC406	90 min
Weight (kg)	3.27	



M18™ REDLITHIUM™ FORGE™

NEW ERA OF PERFORMANCE

Powered by **REDLITHIUM™**

**M18™ FORGE™
6.0AH BATTERY**
M18 FB6

M18™ FORGE™ 6.0Ah BATTERY

M18 FB6

Voltage	18V
Capacity	6.0 Ah
Battery Type	Lithium-Ion
Weight (kg)	1.03

M18™ FORGE™ 8.0Ah BATTERY

M18 FB8

Voltage	18V
Capacity	8.0 Ah
Battery Type	Lithium-Ion
Weight (kg)	1.08

M18™ FORGE™ 12.0Ah BATTERY

M18 FB12

Voltage	18V
Capacity	12.0 Ah
Battery Type	Lithium-Ion
Weight (kg)	1.51

COMPACT
HIGH OUTPUT 12.0
POWER

15 MINS
SUPERCHARGE TO 80%
W/ THE NEW M18 DBSC

LONGER
LIFE
VS REDLITHIUM™

**M18™ DUAL BAY
SUPER CHARGER**
M18 DBSC

M18™ DUAL BAY SUPER CHARGER

M18 DBSC

Power Source	AC			
Charge Type	Simultaneous			
Charging Port	2 x M18™			
Charging time	M18 HB5	60 min	M18 FB6	25 min
	M18 HB8	45 min	M18 FB8	45 min
	M18 HB12	60 min	M18 FB12	45 min
Weight (kg)	2.5			

15 MINS CHARGE
TO 80%
ON M18 FB6

CHARGE ADAPT
ADAPTIVE CHARGE DISTRIBUTION

COOL-CYCLE
CAPABLE
HIGH-SPEED COOLING

M12 M18 BATTERIES AND CHARGERS

HIGH DEMAND EXTRA CAPACITY COMPACT PACK

M12 REDLITHIUM 4.0Ah BATTERY PACK

Voltage	12V
Capacity	4.0 Ah
Battery Type	Lithium-Ion
Weight (kg)	0.4



M12 B4

M12 REDLITHIUM 6.0Ah BATTERY PACK

Voltage	12V
Capacity	6.0 Ah
Battery Type	Lithium-Ion
Weight (kg)	0.4



M12 B6

M12 CHARGER

System	M12
Charging time	M12 B2 40 min
	M12 B4 80 min
	M12 B6 130 min
Weight (kg)	0.5



C12 C

M18 REDLITHIUM 5.0Ah BATTERY PACK

Voltage	18V
Capacity	5.0 Ah
Battery Type	Lithium-Ion
Weight (kg)	0.7



M18 B5

M18 REDLITHIUM HIGH OUTPUT 8.0Ah BATTERY

Voltage	18V
Capacity	8.0 Ah
Battery Type	Lithium-Ion
Weight (kg)	1.1



M18 HB8

M18 REDLITHIUM HIGH OUTPUT 12.0Ah BATTERY

Voltage	18V
Capacity	12.0 Ah
Battery Type	Lithium-Ion
Weight (kg)	1.7



M18 HB12

M12 M18 COMBO CHARGER

System	M12 / M18
Charging time	M18B5 100 min
	M18 HB8 167 min
	M18 HB12 250 min
Weight (kg)	0.7



M12-18C

M12 M18 RAPID CHARGER

System	M12 / M18
Charging time	M18B5 59 min
	M18 HB8 87 min
	M18 HB12 130 min
Weight (kg)	0.7



M12-18FC

L4 PERSONAL LIGHTING

REDLITHIUM USB RECHARGEABLE PERSONAL FLOOD LIGHT

L4 FL-301

Voltage	4V
Max. Lumens	445 / 100
Max. Runtime (h)	2 / 11
Beam Pattern	High / Low
Battery Platform	REDLITHIUM USB
No. of Modes	2
IP Rating	IP52



REDLITHIUM USB RECHARGEABLE PIVOTING WORK LIGHT

L4 PWL-301

Voltage	4V
Max. Lumens	500 / 400 / 100
Max. Runtime (h)	3 / 3 / 10
Beam Pattern	Spot Beam / Flood High / Flood Low
Beam Distance (m)	155
Battery Platform	REDLITHIUM USB
No. of Modes	3



REDLITHIUM USB RECHARGEABLE HI-VIS HARD HAT LAMP

L4 HLVIS-301

Voltage	4V
Max. Lumens	600 / 400 / 150 / 25 / 400
Max. Runtime (h)	2 / 4 / 8 / 20 / 4
Beam Pattern	Flood / Spot
Beam Distance (m)	125
Battery Platform	REDLITHIUM USB
No. of Modes	3



REDLITHIUM USB RECHARGEABLE STICK LIGHT W/ MAGNET

L4 SL550

Voltage	4V
Max. Lumens	High / Low / Spot Mode High / Spot Mode Low
Lumens	550 / 250 / 250 / 100
Run Time	2 / 4.5 / 2 / 5 hrs
Charger Type	USB-C
Charger Time	120 min
USB-C Input	5V DC, 0.1A- 2.1A
IP Rating	IP52



REDLITHIUM USB RECHARGEABLE NECK LIGHT

L4 NL400

Voltage	4V
Modes	High / Low
Lumens	400 / 250
Run Time	2.5 / 8hrs
Charger Type	USB-C
Charger Time	≤ 125 min
USB-C Input	5V DC, 0.1A- 2.1A
IP Rating	IP50



L4 STARTER KIT

L4 PPS

Included in the set	1 x USB Rechargeable portable power source/charger
	1 x USB Battery
	1 x 600mm Cord



REDLITHIUM USB RECHARGEABLE 1100L TWIST FOCUS FLASHLIGHT

L4 TMLED-301

Voltage	4V
Lumens	1100 / 600 / 100
Runtime (h)	1 / 4 / 10
IP Rating	IP67
Beam Distance (m)	175



REDLITHIUM™

3.0 AH REDLITHIUM™ USB BATTERY

L4B3

Charging time	L4 C	120 min
Weight (kg)	0.04	



ROLLING TOOL BOX

- CAPACITY 114 KG
- IMPACT RESISTANT BASE
- 9" ALL TERRAIN WHEELS



PART #	DESCRIPTION	WEIGHT CAPACITY
48-22-8426	PACKOUT Rolling Tool Box	114 kg

ROLLING TOOL CHEST

- DUAL STACK TOP
- IMPACT RESISTANT BASE
- 9" ALL-TERRAIN WHEELS
- PROTECTIVE LID SEAL
- 132 LITER CAPACITY



PART #	DESCRIPTION	WEIGHT CAPACITY	INTERNAL LENGTH	INTERNAL WIDTH	INTERNAL HEIGHT
48-22-8428	PACKOUT Rolling Tool Chest	113 kg	495	825	

TOOL BOXES

- IMPACT RESISTANT BASE
- IP65 RATED PROTECTION
- ALL METAL HARDWARE



PART #	DESCRIPTION	WEIGHT CAPACITY	INTERNAL LENGTH	INTERNAL WIDTH	INTERNAL HEIGHT
48-22-8424	PACKOUT Tool Box	34 kg	500	335	114
48-22-8425	PACKOUT Large Tool Box	45 kg	500	335	216

TOOL CABINET

- SECURE HANG OR STACK
- QUICK ACCESS DOOR
- IMPACT RESISTANT BODY



PART #	DESCRIPTION	WEIGHT CAPACITY
48-22-8445	PACKOUT Cabinet	23 kg

2 DRAWER TOOL BOX

- IMPACT RESISTANT CONSTRUCTION
- METAL REINFORCED CORNER
- CAPACITY 23 KG



PART #	DESCRIPTION	WEIGHT CAPACITY	INTERNAL LENGTH	INTERNAL WIDTH	INTERNAL HEIGHT
48-22-8442	PACKOUT 2-Drawer Tool Box	23 kg	414	318	127

3 DRAWER TOOL BOX

- IMPACT RESISTANT CONSTRUCTION
- METAL REINFORCED CORNER
- CAPACITY 23 KG



PART #	DESCRIPTION	WEIGHT CAPACITY	INTERNAL LENGTH	INTERNAL WIDTH	INTERNAL HEIGHT
48-22-8443	PACKOUT 3-Drawer Tool Box	23 kg	414	318	76

ORGANIZERS

- IMPACT RESISTANT BASE
- IP65 RATED PROTECTION
- NO-TRAVEL BIN SEALS



PART #	DESCRIPTION	INTERNAL LENGTH	INTERNAL WIDTH	INTERNAL HEIGHT
48-22-8430	PACKOUT Organizer	457	305	91
48-22-8435	PACKOUT Compact Organizer	203	305	91

LOW-PROFILE ORGANIZERS

- IMPACT RESISTANT BASE
- IP65 RATED PROTECTION
- NO-TRAVEL BIN SEALS



PART #	DESCRIPTION	INTERNAL LENGTH	INTERNAL WIDTH	INTERNAL HEIGHT
48-22-8431	PACKOUT Low-Profile Organizer	457	305	38
48-22-8436	PACKOUT Low-Profile Compact Organizer	203	305	38

CRATE


- IMPACT RESISTANT BASE
- STACK OR HANG
- CAPACITY 23 KG



PART #	DESCRIPTION	WEIGHT CAPACITY	INTERNAL LENGTH	INTERNAL WIDTH	INTERNAL HEIGHT
48-22-8440	PACKOUT Crate	23 kg	406	335	234

LONG HANDLE TOOL HOLDER

- SECURE LOCKING MECHANISM
- ANTI-SLIP RUBBER GRIPS
- NON-MARRING MAGNETIC DISH
- QUICK ACCESS MAGNETIC DISH



PART #	DESCRIPTION
48-22-8348	PACKOUT Long Handle Tool Holder

15L COMPACT COOLER

- IMPACT RESISTANT BASE
- IP65 RATED PROTECTION
- HOLDS ICE FOR 30 HOURS



PART #	DESCRIPTION	WEIGHT CAPACITY	INTERNAL LENGTH	INTERNAL WIDTH	INTERNAL HEIGHT
48-22-8460	PACKOUT 15L Compact Cooler	15L	198	241	330

TOOL STATION

- SECURE LOCKING MECHANISM
- QUICK ACCESS TOOL SLOTS
- IMPACT RESISTANT BODY
- FITS M18 & M12 RAPID CHARGER ON TOP SHELF



PART #	DESCRIPTION
48-22-8343	PACKOUT Tool Station

M12™ BATTERY RACK

- SECURE LOCKING MECHANISM
- CLIP-IN BATTERY STORAGE
- QUICK ACCESS ORGANIZATION



STORES



FITS ALL M12 BATTERIES

MODEL #	DESCRIPTION
48-22-8338	PACKOUT M12™ Battery Pack

SCREWDRIVER RACK

- SECURE LOCKING MECHANISM
- 34 MULTI-SIZE SLOTS
- 11KG WEIGHT CAPACITY



STORES



VARIOUS SCREWDRIVERS

MODEL #	DESCRIPTION
48-22-8341	PACKOUT Screwdriver Rack

PLIERS RACK

- SECURE LOCKING MECHANISM
- QUICK ACCESS BARS
- 11 KG WEIGHT CAPACITY



STORES



AND MORE

PART #	DESCRIPTION
48-22-8340	PACKOUT Tool Rack

2-WHEEL CART

- STACK OR HANG
- 10" FLAT-FREE WHEELS
- CAPACITY 182 KG



PART #	DESCRIPTION	WEIGHT CAPACITY
48-22-8415	PACKOUT 2-Wheel Cart	182 kg

HOOKS

- SECURE LOCKING MECHANISM
- REINFORCED HOOK MAINTAINS SHAPE
- HANGS ON PACKOUT PLATES
- PROTECTIVE ANTI-SLIP RUBBER GRIPS



MODEL #	DESCRIPTION	STORES
48-22-8330	PACKOUT Straight Utility Hook	Outdoor Power Equipment, Multiple Long Tools, and More
48-22-8334	PACKOUT Small Straight Utility Hook	Power Tools, Hand Tools, and More

M18™ BATTERY RACK

- SECURE LOCKING MECHANISM
- CLIP-IN BATTERY STORAGE
- QUICK ACCESS ORGANIZATION



STORES



FITS ALL M18 BATTERIES

MODEL #	DESCRIPTION
48-22-8339	PACKOUT M18™ Battery Pack

NESTING BINS

- HANGS ON PACKOUT PLATES
- STORES IN:
 - PACKOUT ORGANIZER
 - PACKOUT COMPACT ORGANIZER
- INTERIOR ORGANIZATION TRAY AND DIVIDER
- IMPACT RESISTANT BODY




MODEL #	DESCRIPTION
48-22-8062	4" x 4" Nesting Regular Organizer Bin (2PK)
48-22-8063	4" x 8" Nesting Regular Organizer Bin (2PK)

COMPACT SHELF

- SECURE LOCKING MECHANISM
- 20 LBS CAPACITY
- FULLY CUSTOMIZE YOUR SHOP
- QUICK ACCESS ORGANIZATION



STORES



AND MORE

MODEL #	DESCRIPTION
48-22-8347	PACKOUT Compact Shelf

WALL PLATES

- IMPACT RESISTANT BODY
- QUICK ALIGNMENT TABS
- 68KG WEIGHT CAPACITY (34 KG CAPACITY IN VEHICLE)
- METAL REINFORCED MOUNTING POINTS



PART #	DESCRIPTION	WALL MOUNTED WEIGHT CAPACITY	TRANSIT WEIGHT CAPACITY
48-22-8487	PACKOUT Large Wall Plate	68 kg	34 kg
48-22-8486	PACKOUT Compact Wall Plate	23 kg	11 kg

VERTICAL E-TRACK FOR PACKOUT™ RACKING SHELVES

- POWDER-COATED FINISH
- FIVE SLOTS FOR VERSATILITY
- COMPATIBLE WITH ALL E-TRACK ACCESSORIES



PART #	DESCRIPTION	WEIGHT
48-22-8482	PACKOUT Vertical E-Track for Shelf	1.6 kg

TECH BAG

- TEAR RESISTANT MATERIAL
- IMPACT RESISTANT BASE
- OPTIMIZED STORAGE CAPACITY



PART #	DESCRIPTION
48-22-8300	PACKOUT Tech Bag

BACK PACK

- TEAR RESISTANT MATERIAL
- IMPACT RESISTANT BASE
- OPTIMIZED STORAGE CAPACITY



PART #	DESCRIPTION
48-22-8301	PACKOUT Backpack

SHELVING KIT

- METAL-REINFORCED FRAME
- VERSATILE MOUNTING
- QUICK RELEASE LEVERS
- IMPACT RESISTANT BODY
- CAPACITY 23 KG



PART #	DESCRIPTION	WEIGHT CAPACITY
48-22-8480	PACKOUT Shelving Kit	23 kg

DOLLY

- CAPACITY 114 KG
- QUICKSTOP LOADING LEVER
- SMOOTH ROLL WHEELS



PART #	DESCRIPTION	WEIGHT CAPACITY
48-22-8410	PACKOUT Dolly	114 kg



PERSONAL PROTECTIVE EQUIPMENT

WRECKING WORK GLOVES

- REINFORCED DURABILITY
- HIGH DEXTERITY FINGER TIPS
- SMARTSWIPE™



PART #	DESCRIPTION
48-73-8531	Wrecking Work Gloves - M
48-73-8532	Wrecking Work Gloves - L

HIGH PERFORMANCE SAFETY GLASSES WITH GASKET

- ANTI-SCRATCH LENSES
- MILITARY GRADE IMPACT PROTECTION
- FOG-FREE LENSES



PART #	DESCRIPTION
48-73-2040A	Clear High Performance Safety Glasses with Gasket
48-73-2045A	Polarized High Performance Safety Glasses with Gasket

LIGHTWEIGHT WORK GLOVES

- REINFORCED PALM
- HIGH DEXTERITY FINGER TIPS
- SMARTSWIPE™



PART #	DESCRIPTION
48-73-8521	Lightweight Work Gloves - M
48-73-8522	Lightweight Work Gloves - L

HIGH PERFORMANCE SAFETY GLASSES

- ANTI-SCRATCH LENSES
- MILITARY GRADE IMPACT PROTECTION
- FOG-FREE LENSES



PART #	DESCRIPTION
48-73-2020A	Clear High Performance Safety Glasses

CUT RESISTANT DIPPED GLOVES

- TEXTURED GRIP
- NYLON LYCRA BLEND
- SMARTSWIPE™



PART #	DESCRIPTION
48-22-8901	Cut Level 1 Dipped Gloves - M
48-22-8902	Cut Level 1 Dipped Gloves - L
48-22-8951	Cut Level 5 Dipped Gloves - M
48-22-8952	Cut Level 5 Dipped Gloves - L

SAFETY GLASSES

- ANTI-SCRATCH LENSES
- ANTI-FOG LENSES
- FLEXIBLE NOSE BRIDGE



PART #	DESCRIPTION
48-73-2000A	Clear Safety Glasses
48-73-2005A	Tinted Safety Glasses

BOLT™ FULL BRIM HARD HAT WITH 6-POINT RATCHETING SUSPENSION

- BOLT™ HEADLAMP MOUNT & MARKER CLIP
- QUICK-ADJUST RATCHETING SUSPENSION
- FOUR BOLT™ ACCESSORY SLOTS AND TWO UNIVERSAL ACCESSORY SLOTS



PART #	DESCRIPTION
48-73-1121	6PT White Full Brim Unvented Hard Hat with BOLT™ - Class E

TOOL LANYARDS

- DESIGNED TO REDUCE RISKS OF DROPPED TOOLS
- SHOCK ABSORBING DESIGN GRADUALLY SLOWS TOOL
- COLOR CODED BY WEIGHT RATING



PART #	DESCRIPTION
48-22-8810A	4.5kg 0.91m Locking Tool Lanyard
48-22-8820A	4.5kg 0.91m Quick-Connect Locking Tool Lanyard
48-22-8823A	3pc 4.5kg Quick-Connect Accessory
48-22-8822A	3pc 2.2kg Small Quick-Connect Accessory
48-22-8850A	15kg 0.91m Locking Tool Lanyard

BOLT™ FULL BRIM HARD HAT WITH 4-POINT RATCHETING SUSPENSION

- BOLT™ HEADLAMP MOUNT & MARKER CLIP
- QUICK-ADJUST RATCHETING SUSPENSION
- FOUR BOLT™ ACCESSORY SLOTS AND TWO UNIVERSAL ACCESSORY SLOTS



PART #	DESCRIPTION
48-73-1201	4PT White Full Brim Hard Hat with BOLT™ - Class C

HARD HAT CHIN STRAP

- ADJUSTABLE FOR A QUICK AND CUSTOM FIT.
- SOFT AND COMFORTABLE MATERIAL
- FEATURES SECURE ATTACHMENT CLIPS



PART #	DESCRIPTION
48-73-1082	Hard Hat Chin Strap

ACCESSORIES



48-39-0511 Milwaukee Bandsaw Blade 14 TPI 44-7/8" (3pc / pack)

48-39-0521 Milwaukee Bandsaw Blade 18 TPI 44-7/8" (3pc / pack)



4932472000 Milwaukee Crimping Dies DIN13 CU Die Kit 11 Dies (16-300mm2) for M18 HCCT109/42

4932471997 Milwaukee Crimping Dies DIN22 CU Die Kit 11 Dies

4932464497 Milwaukee HCCT Cutting Jaw for Standard CU/AL Cable Including Blade

4932430839 Milwaukee CU/AL Cutting Jaw

4932464498 Milwaukee CU/AL Replacement Blades

48-00-5186 Milwaukee Thin Kerf Sawzall Blade 24TPI 6" (5pcs/pack)

48-00-5187 Milwaukee Thin Kerf Sawzall Blade 14 TPI 9" (5pcs/pack)

48-00-8782 Milwaukee TORCH Sawzall Blade 14 TPI 6" (25pcs/pack)

48-00-5026 Milwaukee 9"AX Sawzall Blade 5TPI (5pcs/pack)

48-00-5027 Milwaukee 12"AX Sawzall Blade 5TPI (5pcs/pack)

48-00-5784 Milwaukee TORCH Sawzall Blade 18TPI 6" (5pcs/pack)

48-00-5788 Milwaukee TORCH Sawzall Blade 18TPI 9" (5pcs/pack)